


# Mico-R

## LED Emergency Light

Thermoplastic housing.  
 Suitable for recessed ceiling mounting.  
 Two kinds of lens for escape route or open area illumination.  
 Maintained operation  
 Self contained with high temperature Ni-Cd battery.  
 Power: 4.5W LED 6000K.  
 Charge time: 24 Hrs  
 IP Rating: IP20 RoHS Compliant

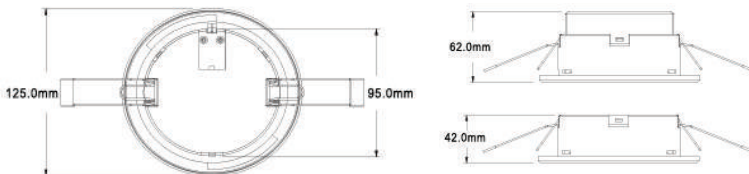


Code	Input	Type	Duration	Test	Lumen	Battery
EMD/3H/MT/M/R/N	220/240V	Maintained	3Hr	Manual	120lm	Ni-Cd 7.2V, 1.0Ah

# Mico-RS

## LED Emergency Light

Thermoplastic housing.  
 Suitable for surface ceiling mounting  
 Two kinds of lens for escape route or open area illumination.  
 Maintained operation  
 Self contained with high temperature Ni-Cd battery.  
 Charge time: 24 Hrs  
 IP Rating: IP20 RoHS Compliant

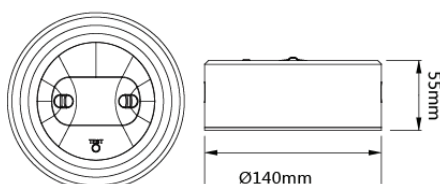

Code	Input	Type	Duration	Test	Lumen	Battery
EMD/3H/MT/M/RS/N	220/240V	Maintained	3Hr	Manual	120lm	Ni-Cd 7.2V, 1.0Ah