

LED Linear

Surface & Suspended light

Strong modern aluminium housing with excellent finish


240V/110VAC isolated driver built-in

Suspended or ceiling mounted version

Options: 3000K, 4000K, 6000K

Lifetime L70: 50 000hrs.

Finish: Silver

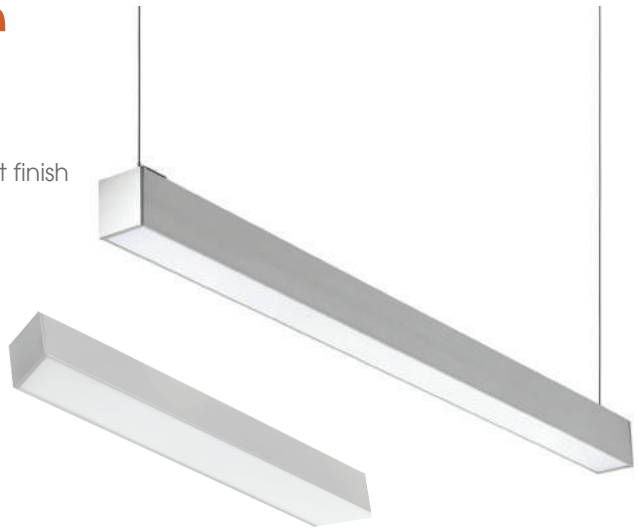

Code	Input	Power	Current	CRI	CCT	Lumen	Dimensions
LG-LLNR6-20-S	220-240V	20W	700mA	80Ra	3000K/4000K/6000K	1860lm/2000lm	614*64*75mm
LG-LLNR12-40-S	220-240V	40W	1050mA	80Ra	3000K/4000K/6000K	3840lm/4000lm	1217*64*75mm
LG-LLNR12-55-S	220-240V	55W	1050mA	80Ra	3000K/4000K/6000K	15000lm/5300lm	1217*64*105mm

LED Linear

Surface & Suspended light with Lens

Strong modern aluminium housing with excellent finish

240V/110VAC isolated driver built-in


Suspended or ceiling mounted version

Lens options: 30°, 60°, 90°, LR20°, P15°

Options: 3000K, 4000K, 6000K

Lifetime L70: 50 000hrs.

Finish: Silver

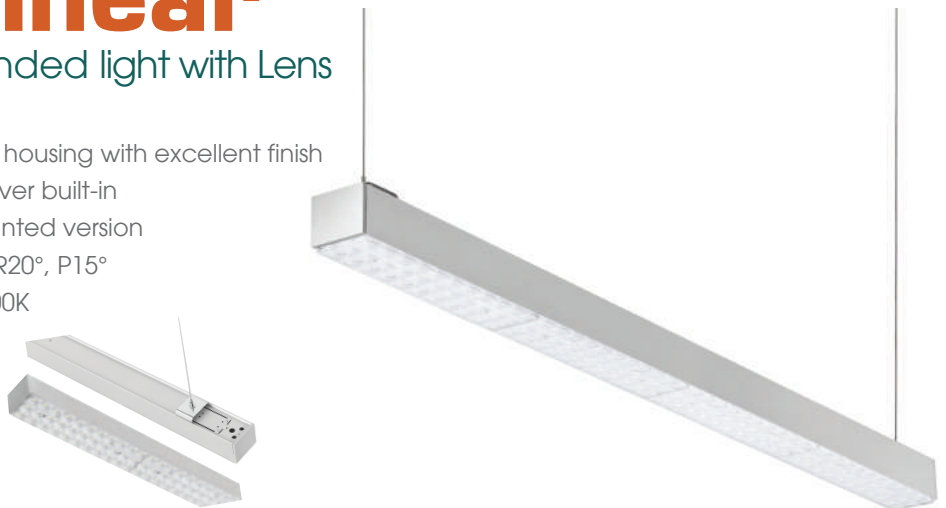

Code	Input	Power	Current	CRI	CCT	Lumen	Dimensions
LG-LLNR6-38-S	220-240V	38W	1050mA	80Ra	3000K/4000K/6000K	4100lm/4400lm	614*64*75mm
LG-LLNR11-53-S	220-240V	53W	1400mA	80Ra	3000K/4000K/6000K	4900lm/5300lm	1157*64*75mm