

Rainbow


LED Ceiling Light

Thermal conductive plastic housing, V-0 flame rating.
 240V/110VAC built-in driver, integrated design.
 Option of recessed and surface mounted installation
 CCT of 3000K, 4000K & 6000K
 IP Rating: IP44
 Lifespan: 50 000Hrs



Code	Input	Power	Current	CRI	CCT	Lumen	Cutout
LG-RB8-12W	220-240V	12W	40mA	80Ra	3000K/4000K/6000K	780lm/840lm/840lm	80-160mm
LG-RB12-18W	220-240V	18W	150mA	80Ra	3000K/4000K/6000K	1260lm/1350lm/1350lm	120-200mm

Dimensions

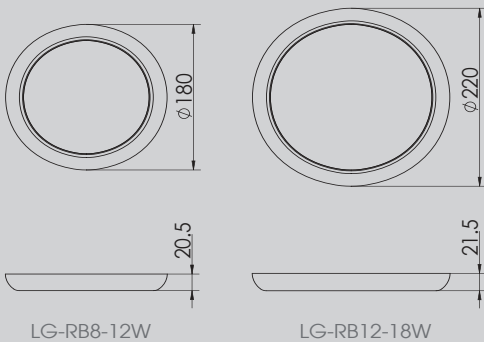

Photometrics

