


# Swan

## LED Backlit Panel

Extremely thin design with only 34mm height  
 Beam angle >170° with PMMA Lens inside  
 Without LGP, no yellowing risk  
 Uniform and soft lighting  
 Economic design  
 Lifetime L70: 50000hrs

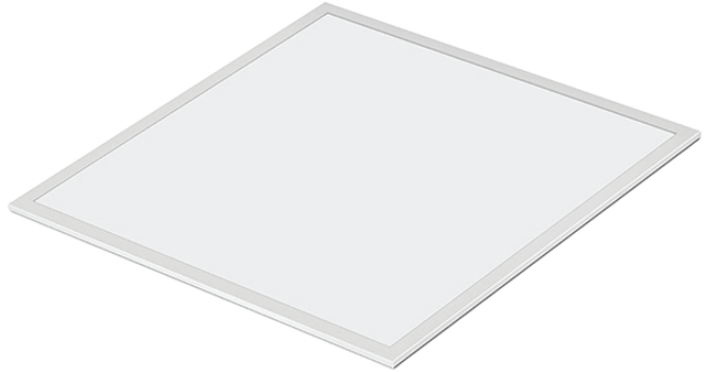

100+ **lm/w**



Code	Input	Power	Current	CRI	CCT	Lumen	Dimensions
T3606-BMH-CW	220-240V	40W	1050mA	80Ra	4000K	4000lm	595*595*33mm
DP10-48W	220-240V	48W	1050mA	80Ra	6500K	4800lm	595*595*33mm

\*Emergency version available upon request

